

# Mira Mode Shower

## Digital Mixer

Smart, simple showering.



### Product Information

Description	Colour	Product No.
Mira Mode Shower, Rear Fed (High Pressure/Combi)	Chrome	1.1874.003
Mira Mode Shower, Rear Fed (Pumped for Gravity)	Chrome	1.1874.004
Mira Mode Shower, Ceiling Fed (High Pressure/Combi)	Chrome	1.1874.007
Mira Mode Shower, Ceiling Fed (Pumped for Gravity)	Chrome	1.1874.008
Mira Mode Shower, Valve Only (High Pressure/Combi)	Chrome	1.1874.013
Mira Mode Shower, Valve Only (Pumped for Gravity)	Chrome	1.1874.014

### Features & Benefits

#### Temperature control


- Thermostatic temperature stability with digital intelligence
- Indicator light signals when shower has reached desired temperature
- Maximum temperature setting for increased safety

#### Easy to fit & maintain

- Replaceable checkvalve and filters
- Supplied with push fit isolators

#### For your customer

- Flow rate: up to 16 l/min at 1 bar (High Pressure) and at 0.1 bar (Pumped)
- Rotary temperature control dial
- Personalise showering settings using the Mira Mode app
- Includes Mira Switch showerhead (except valve only models)

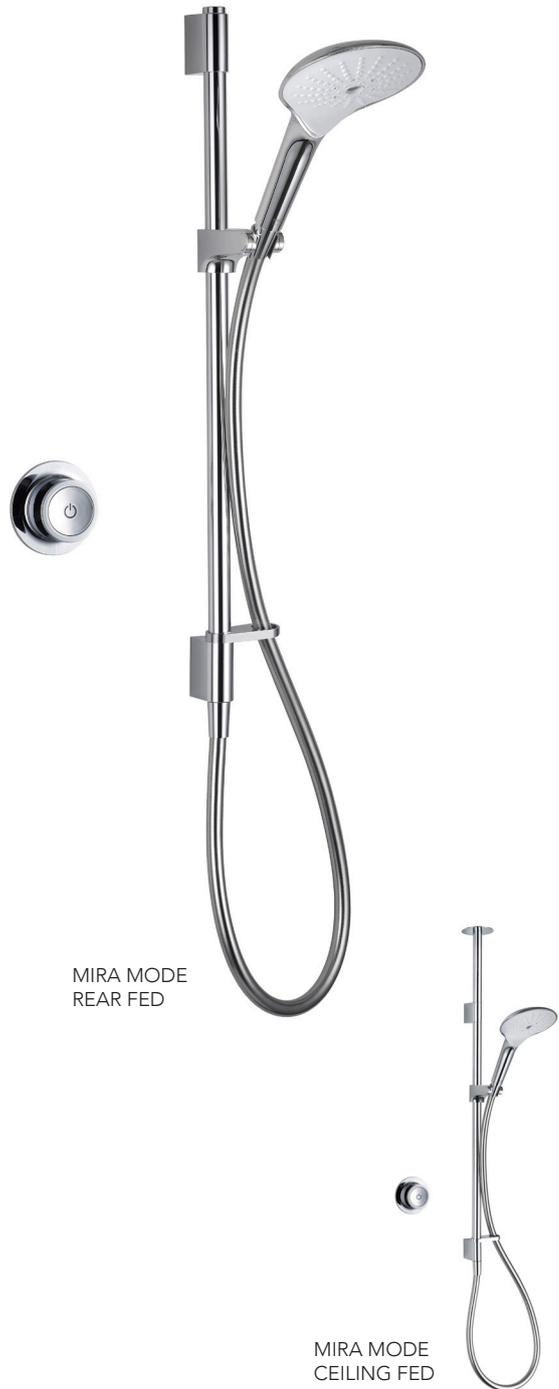

MIRA MODE REAR FED

MIRA MODE CEILING FED

# Product Specification

## Tech Details

### Installation Units & Fittings

Water Entry Points - Back, Rear Fed; Top, Ceiling Fed  
 Inlet Connections: 15mm Push Fit (supplied) or 15mm compression  
 Data Connection to Digital Mixer: Low Voltage Data Cable

### Digital Mixer

Inlet Connections: 15mm Push Fit (supplied) or 15mm compression  
 Outlet connection: 15mm push fit (supplied)  
 Data Connection to control unit and fittings: Low Voltage Data Cable  
 Supply voltage: 230v +10%  
 Supply rating: 3 amp

### Supply Conditions

Minimum maintained pressure:  
 Pumped: 0.01 bar (10cm head); High Pressure: 0.5 bar (5 metre head)  
 Maximum maintained pressure:  
 Pumped: 1.0 bar (10 metre head); High Pressure: 5.0 bar (50 metre head)  
 Maximum static pressure:  
 Pumped: 1.0 bar (10 metre head); High Pressure: 10.0 bar (100 metre head)

### Performance

Flow rate: up to 16 l/min at 0.1 bar (Pumped); 1 bar (High Pressure)  
 Temperature stability:  $\pm 1^\circ\text{C}$

### Safety Features

Phased shutdown: Yes  
 Factory set to safe max temp: Factory set at  $45^\circ\text{C}$


### Approvals

WRAS approved  
 KIWA UK approved product



## Dimensions

### High Pressure Single

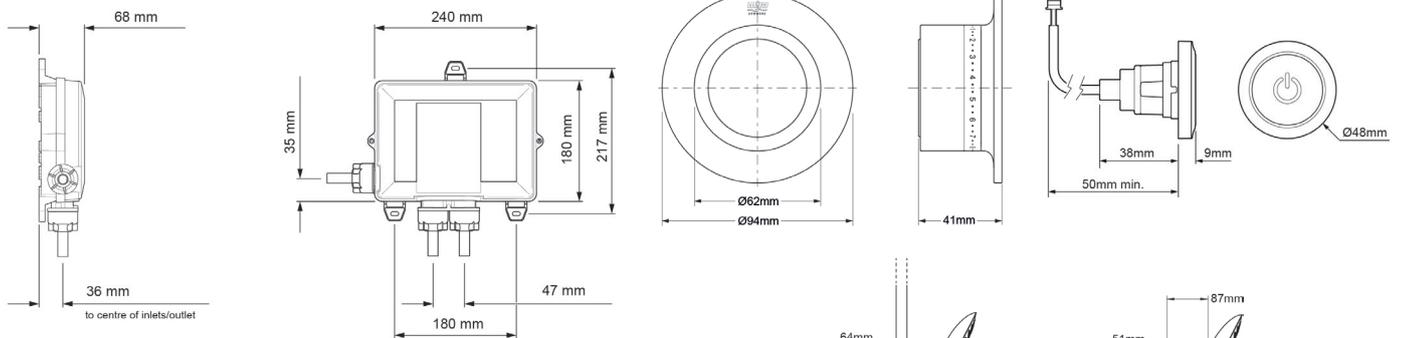

### Low Pressure Single

